


2015

# Transit

## Dimensions and Capacities

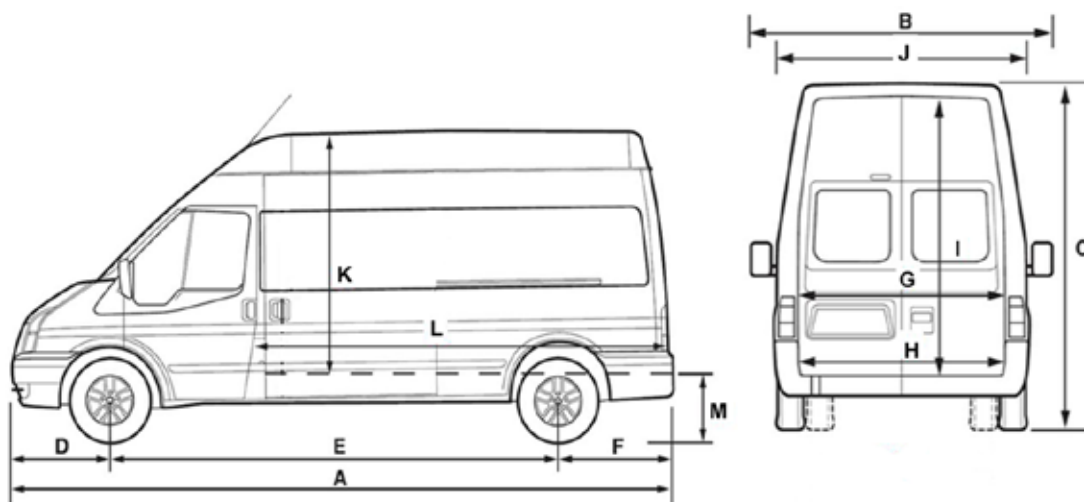

### BODY DIMENSIONS<sup>(1)</sup> — Van

Inches (unless otherwise noted)

Configuration	Low Roof	Med. Roof	Low Roof	Med. Roof	High Roof	High Roof
	RWB	RWB	LWB	LWB	LWB	LWB EL (SRW/DRW)
Description						
A Length	219.9	219.9	237.6	237.6	237.6	266.1
B Width with mirrors	97.4	97.4	97.4	97.4	97.4	97.4
Width without mirrors	81.3	81.3	81.3	81.3	81.3	81.3/83.7
C Height	83.6	100.8	83.2	100.7	110.1	109.4
D Front Overhang	40.3	40.3	40.3	40.3	40.3	40.3
E Wheelbase	129.9	129.9	147.6	147.6	147.6	147.6
F Rear Overhang	49.7	49.7	49.7	49.7	49.7	78.1
G Rear Cargo Door Opening Width	61.7	61.7	61.7	61.7	61.7	61.7
H Cargo Width Between Wheelhouse	54.8	54.8	54.8	54.8	54.8	54.8/45.4
I Rear Cargo Door Opening Height	49.5	64.9	49.5	64.9	74.3	74.3
J Max. Load Width (excluding wheelhouse)	70.2	70.2	70.2	70.2	70.2	70.2
K Max. Cargo Height	56.9	72.0	56.9	72.0	81.5	81.5
L Max. Cargo Length at Floor	126.0	126.0	143.7	143.7	143.7	172.2
M Load Height (curb)	28.9	28.9	28.7	28.7	28.7	28.0

(1) Preliminary dimensions.

RWB = Regular wheelbase  
LWB = Long wheelbase  
EL = Extended length

SRW = Single rear wheel  
DRW = Dual rear wheel

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Dimensions and Capacities cont'd

# 2015

BODY DIMENSIONS <sup>(1)</sup> — Wagon						
Inches (unless otherwise noted)						
Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW/ DRW)
Description						
Wheelbase	130	130	148	148	148	148
Length	219.9	217.8	237.6	235.5	235.5	263.9
Height	82.2	98.7	82.4	99.2	108.6	107.7
Width with mirrors	97.4	97.4	97.4	97.4	97.4	97.4
Width without mirrors	81.3	81.3	81.3	81.3	81.3	81.3
Front Track	68.2	68.2	68.2	68.2	68.2	68.2
Rear Track	68.6	68.6	68.6	68.6	68.6	68.6
Front Overhang	40.3	40.3	40.3	40.3	40.3	40.3
Rear Overhang	49.7	47.6	49.7	47.6	47.6	76.0
Rear Cargo Door Opening Height	46.9/62.8 <sup>(2)</sup>	62.8	46.9	62.8	72.2	72.2
Rear Cargo Door Opening Width	59.8	59.8	59.8	59.8	59.8	59.8
Minimum Running Ground Clearance	6.1	6.1	6.0	6.0	6.0	6.0

(1) Preliminary dimensions.

(2) 10-passenger Wagon.

RWB = Regular wheelbase  
LWB = Long wheelbase  
EL = Extended length

SRW = Single rear wheel  
DRW = Dual rear wheel

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015

# Transit

## Dimensions and Capacities cont'd

### BODY DIMENSIONS<sup>(1)</sup> — Cutaway (Low Roof)

Inches (unless otherwise noted)

Configuration	RWB SRW	RWB DRW	LWB SRW	LWB DRW	LWB EL DRW
Description					
Wheelbase	138	138	156	156	178
Length	223.3	223.3	241.1	241.1	263.4
Height	87.3	86.3	87.0	86.5	86.5
Width	80.8	83.1	80.8	83.1	83.1
Front Track	68.2	68.5	68.2	68.5	68.5
Rear Track	68.6	65.7	68.6	65.7	65.7
Front Overhang	40.3	40.3	40.3	40.3	40.3
Rear Overhang (Rear Axle to End of Frame)	45.1	45.1	45.1	45.1	45.1
Load Height (Loaded)	25.0	24.7/24.5	25.9/ 25.5	25.7/25.4	25.0/24.6
Cab Length	95.7	95.7	95.7	95.7	95.7
Cab Rear to Rear Axle	82.6	82.6	100.3	100.3	122.6
Top of Frame to Top of Cab	61.2	61.2	61.2	61.2	61.2

(1) Preliminary dimensions.

### BODY DIMENSIONS<sup>(1)</sup> — Chassis Cab (Low Roof)

Inches (unless otherwise noted)

Configuration	RWB SRW	RWB DRW	LWB SRW	LWB DRW	LWB EL DRW
Description					
Wheelbase	138	138	156	156	178
Length	223.3	223.3	241.1	241.1	263.4
Height	87.2	86.7	86.9	86.4	86.4
Width	80.8	83.1	80.8	83.1	83.1
Front Track	68.2	68.5	68.2	68.5	68.5
Rear Track	68.6	65.7	68.6	65.7	65.7
Front Overhang	40.3	40.3	40.3	40.3	40.3
Rear Overhang (Rear Axle to End of Frame)	45.1	45.1	45.1	45.1	45.1
Load Height (Loaded)	24.8	24.7/24.3	25.6/25.3	25.6/25.2	24.9/24.4
Cab Length	95.7	95.7	95.7	95.7	95.7
Cab Rear to Rear Axle	82.6	82.6	100.3	100.3	122.6
Top of Frame to Top of Cab	61.2	61.2	61.2	61.2	61.2

(1) Preliminary dimensions.

RWB = Regular wheelbase  
LWB = Long wheelbase  
EL = Extended length

SRW = Single rear wheel  
DRW = Dual rear wheel

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Dimensions and Capacities cont'd

# 2015

### INTERIOR DIMENSIONS<sup>(1)</sup> — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW)	High Roof LWB EL (DRW)
<b>Description (in.)</b>							
<b>Head Room</b>							
1st Row	40.8	52.0	40.8	52.0	56.6	56.6	56.6
2nd Row <sup>(2)</sup>	41.1	55.8	41.1	55.8	65.2	65.2	65.2
3rd Row <sup>(2)</sup>	40.6	55.8	65.2	55.8	65.2	65.2	65.2
4th Row <sup>(2)</sup>	38.7 <sup>(3)</sup>	55.8 <sup>(3)</sup>	38.7	55.8	65.2	65.2	65.2
5th Row <sup>(2)</sup>	—	—	34.2 <sup>(4)</sup>	47.2 <sup>(4)</sup>	55.0 <sup>(4)</sup>	55.0 <sup>(4)</sup>	55.0 <sup>(4)</sup>
<b>Shoulder Room</b>							
1st Row	67.9	67.9	67.9	67.9	67.9	67.9	67.9
2nd Row <sup>(2)</sup>	71.4/71.0 <sup>(3)</sup>	71.0/71.4 <sup>(3)</sup>	71.4	71.4	71.4	71.4	71.4
3rd Row <sup>(2)</sup>	67.0	67.0	67.0	67.0	67.0	67.0	67.0
4th Row <sup>(2)</sup>	67.8 <sup>(3)</sup>	67.8 <sup>(3)</sup>	67.8	67.8	67.8	67.8	67.8
5th Row <sup>(2)</sup>	—	—	60.8 <sup>(4)</sup>	60.8 <sup>(4)</sup>	60.8 <sup>(4)</sup>	60.8 <sup>(4)</sup>	60.8 <sup>(4)</sup>
<b>Hip Room</b>							
1st Row	67.5/67.0 <sup>(3)</sup>	67.0/67.5 <sup>(3)</sup>	67.5	67.5	67.5	67.5	67.5
2nd Row <sup>(2)</sup>	69.6	69.6	69.6	69.6	69.6	69.6	69.6
3rd Row <sup>(2)</sup>	67.3	67.3	67.3	67.3	67.3	67.3	67.3
4th Row <sup>(2)</sup>	68.0 <sup>(3)</sup>	68.0 <sup>(3)</sup>	68.0	68.0	68.0	68.0	68.0
5th Row <sup>(2)</sup>	—	—	61.0 <sup>(4)</sup>	61.0 <sup>(4)</sup>	61.0 <sup>(4)</sup>	61.0 <sup>(4)</sup>	61.0 <sup>(4)</sup>
<b>Leg Room</b>							
1st Row	39.7	39.7	39.7	39.7	39.7	39.7	39.7
2nd Row <sup>(2)</sup>	33.7	33.7	33.7	33.7	33.7	33.7	33.7
3rd Row <sup>(2)</sup>	35.6	35.6	35.6	35.6	35.6	35.6	35.6
4th Row <sup>(2)</sup>	35.6 <sup>(3)</sup>	35.6 <sup>(3)</sup>	35.6	35.6	35.6	35.6	35.6
5th Row <sup>(2)</sup>	—	—	35.6 <sup>(4)</sup>	35.6 <sup>(4)</sup>	35.6 <sup>(4)</sup>	35.6	35.6
<b>Cargo Width (max. excluding wheelhouses)</b>							
Van	70.2	70.2	70.2	70.2	70.2	70.2	70.2
Wagon	69.8	69.8	69.8	69.8	69.8	69.8	69.8
<b>Cargo Width between Wheelhouses</b>							
Van	54.8	54.8	54.8	54.8	54.8	54.8	45.4
Wagon	53.7	53.7	53.7	53.7	53.7	53.7	53.7
<b>Cargo Floor to Ceiling Height (max. load height)</b>							
Van	56.9	72.0	56.9	72.0	81.5	81.5	81.5
Wagon	52.8 <sup>(5)</sup> 67.6 <sup>(3)</sup>	67.6	52.8	67.6	77.0	77.0	77.0

(1) Preliminary dimensions.  
 (2) Wagon only.  
 (3) 10-passenger Wagon.

(4) 15-passenger Wagon.  
 (5) 8-passenger Wagon.

LR = Low roof  
 MR = Medium roof  
 HR = High roof

RWB = Regular wheelbase  
 LWB = Long wheelbase  
 EL = Extended length

SRW = Single rear wheel  
 DRW = Dual rear wheel

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015

# Transit

## Dimensions and Capacities cont'd

### INTERIOR DIMENSIONS<sup>(1)</sup> — Cutaway/Chassis Cab SRW and DRW

Configuration	RWB	LWB	LWB EL
<b>Description (in.)</b>			
Wheelbase	138	156	178
Head Room – 1st Row	44.9	44.9	44.9
Max. Leg Room – 1st Row	41.3	41.3	41.3
Hip Room – 1st Row	67.5	67.5	67.5
Shoulder Room – 1st Row	67.9	67.9	67.9

### CARGO DIMENSIONS<sup>(1)</sup> — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL (SRW)	High Roof LWB EL (DRW Van)
<b>Description (cu. ft.)</b>	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon
Cargo Length Front (at Floor)	126.0/124.0	126.0/124.0	143.7/141.7	143.7/141.7	143.7/141.7	172.2/170.2	172.2/170.2
Cargo Length Front (at Belt)	115.9/115.1	115.9/115.1	133.6/132.8	133.6/132.8	133.6/132.8	162.0/161.3	162.0/161.3
Cargo Length w/ Front-passenger Seat Removed <sup>(2)</sup>	285.0/—	363.8/—	316.1/—	405.6/—	459.2/—	542.2/—	542.2/—
Cargo Width Between Wheelhouses	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	54.8/53.7	45.4/53.7
Cargo Height Maximum	56.9/52.8 <sup>(3)</sup> / 67.6 <sup>(4)</sup>	72.0/67.6	56.9/52.8	72.0/67.6	81.5/77.0	81.5/77.0	81.5/77.0

(1) Preliminary dimensions.

(2) Van only.

(3) 8-passenger Wagon.

(4) 10-passenger Wagon.

### PASSENGER/CARGO VOLUME<sup>(1)</sup> — Van/Wagon

Configuration	Low Roof RWB	Med. Roof RWB	Low Roof LWB	Med. Roof LWB	High Roof LWB	High Roof LWB EL
<b>Description (cu. ft.)</b>	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon	Van/Wagon
Passengers	2/8-10	2/8-10	2/12-15	2/12-15	2/12-15	2/15
Rows of Seats	1/3-4	1/3-4	1/4-5	1/4-5	1/4-5	1/5
Cargo Volume Behind 1st Row	246.7/224.5 <sup>(3)</sup>	315.2/292.7	277.7/256.4	357.1/336.1	404.3/382.6	487.3 <sup>(2)</sup> / 461.9
Cargo Volume Behind 2nd Row	—/151.8	—/197.9	—/183.0	—/239.8	—/273.0	—/349.6
Cargo Volume Behind 3rd Row	—/94.2	—/125.0	—/124.5	—/166.9	—/190.0	—/266.6
Cargo Volume Behind 4th Row	—/39.1 <sup>(4)</sup>	—/—	—/70.1	—/93.9	—/107.0	—/184.0
Cargo Volume Behind 5th Row	—/—	—/—	—/NA	—/NA	—/NA	—/100.5

— = Not available NA = Not applicable

(1) Preliminary dimensions.

(2) SRW models. Less incremental wheel well width for DRW.

(3) 8-passenger Wagon.

(4) 10-passenger Wagon.

RWB = Regular wheelbase  
LWB = Long wheelbase  
EL = Extended lengthSRW = Single rear wheel  
DRW = Dual rear wheel**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit Weight Ratings

# 2015

## GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van RWB, Low Roof (83.6")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		Total
					Front	Rear	Front	Rear	
130.0	3.7L	8600	3600	1770	4130	5070	2868	2082	4950
130.0	3.5L	8600	3550	1720	4130	5070	2939	2061	5000
130.0	3.2L	8600	3220	1366	4130	5070	3115	2210	5325
130.0	3.7L	9000	4000	1770	4130	5515	2868	2082	4950
130.0	3.5L	9000	3950	1720	4130	5515	2939	2061	5000
130.0	3.2L	9000	3620	1366	4130	5515	3115	2210	5325

## GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van RWB, Medium Roof (100.8")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		Total
					Front	Rear	Front	Rear	
130.0	3.7L	8600	3540	1712	4130	5070	2880	2128	5008
130.0	3.5L	8600	3470	1645	4130	5070	2951	2123	5074
130.0	3.2L	8600	3100	1253	4130	5070	3127	2310	5437
130.0	3.7L	9000	3940	1712	4130	5515	2880	2128	5008
130.0	3.5L	9000	3870	1645	4130	5515	2951	2123	5074
130.0	3.2L	9000	3500	1253	4130	5515	3127	2310	5437

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015

# Transit

## Weight Ratings cont'd

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, Low Roof (83.2")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		Total
					Front	Rear	Front	Rear	
148.0	3.7L	8600	3490	1546	4130	5070	2949	2101	5050
148.0	3.5L	8600	3440	1495	4130	5070	3020	2080	5100
148.0	3.2L	8600	3060	1149	4130	5070	3196	2284	5480
148.0	3.7L	9000	3890	1546	4130	5515	2949	2101	5050
148.0	3.5L	9000	3840	1495	4130	5515	3020	2080	5100
148.0	3.2L	9000	3460	1149	4130	5515	3196	2284	5480
148.0	3.7L	9500	4390	1546	4130	5515	2949	2101	5050
148.0	3.5L	9500	4340	1495	4130	5515	3020	2080	5100

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, Medium Roof (100.7")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		Total
					Front	Rear	Front	Rear	
148.0	3.7L	8600	3440	1487	4130	5070	2963	2145	5108
148.0	3.5L	8600	3370	1420	4130	5070	3034	2140	5174
148.0	3.2L	8600	2990	1139	4130	5070	3210	2340	5550
148.0	3.7L	9000	3840	1487	4130	5515	2963	2145	5108
148.0	3.5L	9000	3770	1420	4130	5515	3034	2140	5174
148.0	3.2L	9000	3390	1079	4130	5515	3210	2340	5550
148.0	3.7L	9500	4340	1487	4130	5515	2963	2145	5108
148.0	3.5L	9500	4270	1420	4130	5515	3034	2140	5174

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Weight Ratings cont'd

# 2015

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB, High Roof (110.1")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0	3.7L	9000	3780	1426	4130	5515	2979	2189	5168
148.0	3.5L	9000	3700	1349	4130	5515	3049	2196	5245
148.0	3.2L	9000	3310	1003	4130	5515	3226	2399	5625
148.0	3.7L	9500	4280	1426	4130	5515	2979	2189	5168
148.0	3.5L	9500	4200	1349	4130	5515	3049	2196	5245

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Van LWB EL, High Roof (109.4")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0	3.7L	9000	3500	1141	4130	5515	2871	2573	5444
148.0	3.5L	9000	3430	1074	4130	5515	2942	2568	5510
148.0	3.2L	9000	3060	815	4130	5515	3118	2756	5874
148.0	3.7L	9500	4000	1141	4130	6000	2871	2573	5444
148.0	3.5L	9500	3930	1074	4130	6000	2942	2568	5510
148.0	3.2L	9500	3560	815	4130	6000	3118	2756	5874
148.0 DRW	3.5L	9950	4240	933	4130	6835	2987	2663	5650
148.0 DRW	3.2L	9950	3870	674	4130	6835	3163	2851	6014
148.0 DRW	3.5L	10,360	4650	933	4130	7275	2987	2663	5650
148.0 DRW	3.2L	10,360	4280	674	4130	7275	3163	2851	6014

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.



2015

# Transit

## Weight Ratings cont'd

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon RWB, Low Roof (82.2")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
130.0	3.7L	8550	2880	1074	4130	5070	2905	2705	5610
130.0	3.7L	8550	2980	1175	4130	5070	2925	2585	5510
130.0	3.5L	8550	2830	1023	4130	5070	2975	2685	5660
130.0	3.5L	8550	2930	1124	4130	5070	2995	2565	5560

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon RWB, Medium Roof (98.7")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
130.0	3.7L	8550	2820	1015	4130	5070	3008	2660	5668
130.0	3.7L	8550	2920	1116	4130	5070	3028	2540	5568
130.0	3.5L	8550	2770	965	4130	5070	3036	2682	5718
130.0	3.5L	8550	2870	1066	4130	5070	3098	2520	5618

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, Low Roof (82.4")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0	3.7L	8550	2730	905	4130	5070	3097	2663	5760
148.0	3.5L	8550	2680	855	4130	5400	3168	2642	5810
148.0	3.2L	8550	2420	676	4130	5400	3312	2748	6060
148.0	3.7L	9000	2900	628	4130	5730	3093	2941	6034
148.0	3.5L	9000	2850	578	4130	5730	3163	2921	6084
148.0	3.2L	9250	2850	399	4130	5730	3307	3027	6334

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Weight Ratings cont'd

# 2015

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, Medium Roof (99.2")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0	3.7L	8550	2670	847	4130	5400	3109	2709	5818
148.0	3.5L	8550	2620	796	4130	5400	3180	2688	5868
148.0	3.2L	8550	2370	618	4130	5400	3324	2794	6118
148.0	3.7L	9000	2840	570	4130	5730	3107	2985	6092
148.0	3.5L	9000	2790	519	4130	5730	3178	2964	6142
148.0	3.2L	9250	2790	341	4130	5730	3321	3071	6392

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB, High Roof (108.6")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0	3.7L	8550	2600	776	4130	5400	3124	2764	5888
148.0	3.5L	8550	2550	726	4130	5400	3195	2743	5938
148.0	3.2L	8550	2330	503	4130	5400	3338	2820	6158
148.0	3.7L	9000	2810	538	4130	5730	3122	3002	6124
148.0	3.5L	9000	2760	487	4130	5730	3193	2981	6174
148.0	3.2L	9250	2750	300	4130	5730	3336	3096	6432

### GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Wagon LWB EL, High Roof (107.7")<sup>(1)</sup>

Wheelbase (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
148.0 DRW	3.5L	10,360	3710	632	4130	6720	3177	3400	6577
148.0 DRW	3.2L	10,360	3340	300	4130	6720	3353	3588	6941

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

2015

# Transit

## Weight Ratings cont'd

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Cutaway,  
138.0"/156.0"/178.0" Lengths, Low Roof (87.3")<sup>(1)</sup>

Length (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
138.0	3.7L	9000	4590	3912	4130	5515	2789	1577	4366
138.0	3.2L	9000	4280	3648	4130	5515	3003	1661	4664
138.0 DRW	3.7L	9950	5380	3759	4130	6500	2837	1681	4518
138.0 DRW	3.2L	9950	5080	3495	4130	6500	3051	1765	4816
138.0 DRW	3.7L	10,360	5790	3759	4130	7275	2837	1681	4518
138.0 DRW	3.2L	10,360	5490	3495	4130	7275	3051	1765	4816
156.0	3.7L	9000	4480	3809	4130	5515	2875	1591	4466
156.0	3.2L	9000	4200	3567	4130	5515	3089	1656	4745
156.0	3.7L	9500	4980	3809	4130	6000	2875	1591	4466
156.0	3.2L	9500	4700	3567	4130	6000	3089	1656	4745
156.0 DRW	3.7L	9950	5280	3656	4130	6835	2923	1695	4618
156.0 DRW	3.2L	9950	5000	3417	4130	6835	3117	1776	4893
156.0 DRW	3.7L	10,360	5690	3656	4130	7275	2923	1695	4618
156.0 DRW	3.2L	10,360	5410	3417	4130	7275	3117	1776	4893
178.0 DRW	3.7L	9950	5140	3521	4130	6835	2927	1832	4759
178.0 DRW	3.2L	9950	4880	3301	4130	6835	3142	1872	5014
178.0 DRW	3.7L	10,360	5550	3521	4130	7275	2927	1832	4759
178.0 DRW	3.2L	10,360	5290	3301	4130	7275	3142	1872	5014

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Weight Ratings cont'd

# 2015

GVWR/PAYLOAD/ARC/GAWR/BASE CURB WEIGHT – Chassis Cab,  
138.0"/156.0"/178.0" Lengths, Low Roof (87.2")<sup>(1)</sup>

Length (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)	ARC Weight (lbs.)	Max. Std. Spring Select GAWR (lbs.)		Base Curb Weight (lbs.)		
					Front	Rear	Front	Rear	Total
138.0	3.7L	9000	4540	3868	4130	5515	2815	1595	4410
138.0	3.2L	9000	4240	3604	4130	5515	3029	1679	4708
138.0 DRW	3.7L	9950	5340	3714	4130	6500	2863	1699	4562
138.0 DRW	3.2L	9950	5040	3450	4130	6500	3078	1782	4860
138.0 DRW	3.7L	10,360	5750	3714	4130	7275	2863	1699	4562
138.0 DRW	3.2L	10,360	5450	3450	4130	7275	3078	1782	4860
156.0	3.7L	9000	4440	3765	4130	5515	2901	1609	4510
156.0	3.2L	9000	4140	3503	4130	5515	3115	1693	4808
156.0	3.7L	9500	4940	3765	4130	6000	2901	1609	4510
156.0	3.2L	9500	4660	3522	4130	6000	3115	1674	4789
156.0 DRW	3.7L	9950	5240	3611	4130	6835	2949	1713	4662
156.0 DRW	3.2L	9950	4950	3365	4130	6835	3114	1801	4945
156.0 DRW	3.7L	10,360	5650	3611	4130	7275	2949	1713	4662
156.0 DRW	3.2L	10,360	5360	3365	4130	7275	3114	1801	4945
178.0 DRW	3.7L	9950	5100	3487	4130	6835	2954	1839	4793
178.0 DRW	3.2L	9950	4840	3256	4130	6835	3168	1890	5058
178.0 DRW	3.7L	10,360	5510	3487	4130	7275	2954	1839	4793
178.0	3.2L	10,360	5250	3256	4130	7275	3168	1890	5058

(1) Weights are for single rear wheel (SRW) vehicles unless otherwise noted.

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

### Axles

#### REAR AXLE SPECIFICATIONS

		<b>SRW/DRW</b>
<b>Make</b>		<b>Sterling</b>
<b>Max. Rating @ Ground (lbs.)</b>		<b>5512/7275</b>
<b>Driveline Attachment</b>	— <b>Type</b>	<b>Circular Flange</b>
	— <b>Bolt Circle (in.)</b>	<b>4.25</b>
<b>Housing</b>	— <b>Type</b>	<b>Cast Iron Carrier</b>
	— <b>Size (in.)</b>	<b>9.75</b>
	— <b>Cover Attachment</b>	<b>Steel</b>
<b>Section</b>	— <b>Tube Dia. (in.)</b>	<b>3.24</b>
	— <b>Thickness (in.)</b>	<b>0.32/0.42</b>
<b>Synthetic Lubricant</b>	— <b>Type</b>	<b>75W85</b>
	— <b>Capacity (pt.)</b>	<b>6.0–6.15 (Conventional) 5.75–5.90 (Limited-slip)</b>
<b>Spring Centers (in.)</b>		<b>48.51/43.70</b>
<b>Wheel Bearings</b>	— <b>Type</b>	<b>Tapered Roller</b>
<b>Gears</b>	— <b>Type</b>	<b>Hypoid</b>
	— <b>Material</b>	<b>Steel</b>
<b>Ring Gear</b>	— <b>Pitch Dia. (in.)</b>	<b>9.75</b>
<b>Pinion</b>	— <b>Mounting</b>	<b>Straddle</b>
<b>Differential</b>	— <b>Type</b>	<b>Conventional and L/S</b>
<b>Axle Shaft</b>	— <b>Spline Minor Dia. (in.)</b>	<b>1.29</b>
	— <b>Spine Major Dia (in.)</b>	<b>1.37</b>
	— <b>No. of Splines (Hub End)</b>	<b>34</b>

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Technical Specifications cont'd

# 2015

### Brakes

#### FRONT/REAR DISC

Type	Series/ Model	Axle Usage (lbs.)	Rotor Dia. (in.)		Brake Lining Segment	Area (sq. in.)/ Width (in.)/ Thickness (in.)	Caliper Piston No. Dia. (in.)	Gross Lining Area Per Axle (sq. in.)	Total Swept Area Per Axle (sq. in.)
			OD	ID					
Front Disc	Van	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
	Wagon	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
	Cutaway/ Chassis Cab	All	12.1	6.5	Outboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
					Inboard	8.4/2.3/0.33	2 x 1.89	16.8	163.0
Rear Disc	Van	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
	Wagon	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
	Cutaway/ Chassis Cab	All	12.1	7.9	Outboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0
					Inboard	6.0/1.9/0.41	1 x 2.13	12.0	133.0

#### BRAKE MASTER CYLINDER SPECIFICATIONS

Type	Series/Model	Bore Dia. (in.)	Booster Type
Dual System, Dash-mounted	N/A	1.125	10+10 Tandem

### Cooling Systems

#### COOLING SYSTEM SPECIFICATIONS

Engine	Cooling	Trans. Usage	Radiator						Cooling System Capacity (qts.)	In-tank Trans. Cooler	Fan Specifications		
			Frontal Area (sq. in.)	Core Size (in.)		Rows of Tubes	Fins Per Inch	No. of Blades			Blade Dia. (in.)		
				Height	Width							Thick- ness	
3.7L V6	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	12.4 (Base) 13.6 (Aux.)	NA	Twin Electric	7+7	12.2 15.16
3.5L EcoBoost V6	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	12.4 (Base) 13.6 (Aux.)	NA	Twin Electric	7+7	12.2 15.16
3.2L Power Stroke I-5 Diesel (Main Loop)	Standard	6R80	583.5	19.25	30.31	0.99	1	21.6	11.6 (Base) 12.8 (Aux.)	NA	Viscous + Single Electric	9 (Visc.) 11 (Elec.)	15.35 (Visc.) 11 (Elec.)

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Revised February 2014

esourcebook.dealerconnection.com

RE&T: 2015 Source Book

2015

# Transit

## Technical Specifications cont'd

<b>BODY</b>			
Construction	Steel unibody		
Final Assembly Location	Kansas City, MO		
<b>POWERTRAIN AND CHASSIS</b>			
<b>ENGINE</b>			
Type	3.7L V6	3.5L EcoBoost V6	3.2L Power Stroke I-5 Diesel
Manufacturing Location	Cleveland Engine Plant	Cleveland Engine Plant	Struandale Engine Plant, South Africa
Configuration	Aluminum block and head	Aluminum block and head	Cast-iron block and aluminum head
Intake Manifold	Composite	Composite	Injection-molded, friction-molded PA manifold
Exhaust Manifold	Cast high Sil Moly	Cast high Sil Moly	Grade 3 SiMo ductile iron
Crankshaft	Forged	Forged	Cast Iron
Redline	6850 rpm	6200 rpm	4500 rpm
Idle Speed in Drive	600 rpm	580 rpm	800±50 rpm
Throttle Body	Electronic	Electronic	Electronic
Valvetrain	DOHC, 4 valves per cylinder	DOHC, 4 valves per cylinder	DOHC, 4 valves per cylinder
Cylinder Head Valve Diameter (mm)	Intake 37, Exhaust	Intake 37, Exhaust 31	Intake 29.9, Exhaust 25.8
Pistons	Aluminum	Aluminum with steel ring carrier	Cast aluminum
Connecting Rods	Powdered metal	Powdered metal	Forged
Ignition	Coil-on-plug	Coil-on-plug	ISS metallic glow plug
Bore (in.) x Stroke (in.)	3.76 x 3.41	3.64 x 3.41	3.54 x 3.96
Displacement (cu. in./cc)	227/3731	213/3496	195/3198
Compression Ratio	10.5:1	10.0:1	15.8:1
Horsepower	270 @ 6500 rpm	320 @ 5500 rpm	190 @ 3000 rpm
Torque (lb.-ft.)	250 @ 4000 rpm	400 @ 2250 rpm	346 @ 1750–2750 rpm
Recommended Fuel (octane)	87 or E85	87	B20
Fuel Capacity (gal.)	25	25	25
Fuel Injection	Sequential multiport electronic	Direct gasoline injection, dual turbochargers	High-pressure common-rail direct diesel injection
Oil Capacity (quarts)	6.9	7.0	11.6 (max. dipstick [wet oil fill])
Recommended Oil	5W-20 GF-S	5W-30 GF-S	5W-30 (initial oil; 10W30 [service oil])
Coolant Capacity (gal.)	3.1 (Base) 3.4 (Aux.)	3.1 (Base) 3.4 (Aux.)	2.9 (Base) 3.2 (Aux.)
<b>EMISSIONS</b>			
Federal Standards	Yes	Yes	Yes
California Standards	Yes	Yes	TBD
<b>DRIVETRAIN</b>			
Layout	Front-engine, rear-wheel drive	Front-engine, rear-wheel drive	Front-engine, rear-wheel drive
<b>TRANSMISSION</b>			
Type	6-speed automatic overdrive with SelectShift		

**NOTE:** Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

# Transit

## Technical Specifications cont'd

# 2015

Transit

### GEAR RATIOS

1st	4.17:1
2nd	2.34:1
3rd	1.52:1
4th	1.14:1
5th	0.86:1
6th	0.69:1
Reverse	-3.40:1

### SUSPENSION

Front	Independent MacPherson strut with stabilizer bar
Rear	Solid axle, leaf springs, heavy-duty gas shock absorbers

### STEERING

Type	Hydraulic power rack-and-pinion		
Steering Column	Collapsible		
Turning Diameter (curb-to-curb) (ft.)	Length (in.)	Wheelbase	SRW/DRW
Van/Wagon	130.0	RWB	42.9/—
	148.0	LWB	48.0/47.8
Cutaway/Chassis Cab	138.0	RWB	45.2/45.0
	156.0	LWB	50.3/50.1
	178.0	LWB EL	—/56.4

### BRAKES

Type	4-wheel vented front disc and solid rear disc with Anti-lock Braking System (ABS)
Front	Twin-piston front calipers, semi-metallic pads
Rear	Single-piston integrated calipers, low-metallic pads
Assist Type	Vacuum, RSC

### PARKING BRAKE

Type	Rear brake integrated caliper, hand-operated
------	--

### ELECTRICAL

Alternator	— Rating	150 amps, 2025 watts
Alternator, HD	— Rating	220 amps, 2970 watts (Gas)
	— Rating	210 amps, 2835 watts (Diesel)
Battery	— Type	Maintenance-free
	— Rating	72 amp/hr., 615 CCA (Gas)
	— Rating	78 amp/hr., 760 CCA, AGM (std. Diesel; opt. Gas)

### WHEELS AND TIRES

Wheels	16" steel
Tires	235/65R16C 121/119R BSW (SRW)
	195/75R16C 107/105R BSW (DRW) ETRO Commercial Tires

### FUEL ECONOMY

EPA-estimated Ratings <sup>(1)</sup>	Not yet rated
--------------------------------------	---------------

(1) Actual mileage will vary. 2015 fuel economy EPA estimates will be made available prior to production release. Stay tuned to eSourceBook for updates.

NOTE: Please see the Major Product Summary pages and/or the Dealer Ordering Guide for availability.

Revised February 2014

[esourcebook.dealerconnection.com](http://esourcebook.dealerconnection.com)

RE&T: 2015 Source Book